




1 CONNECTION

Disconnect the power supply to the motor affected by the programming before you start.

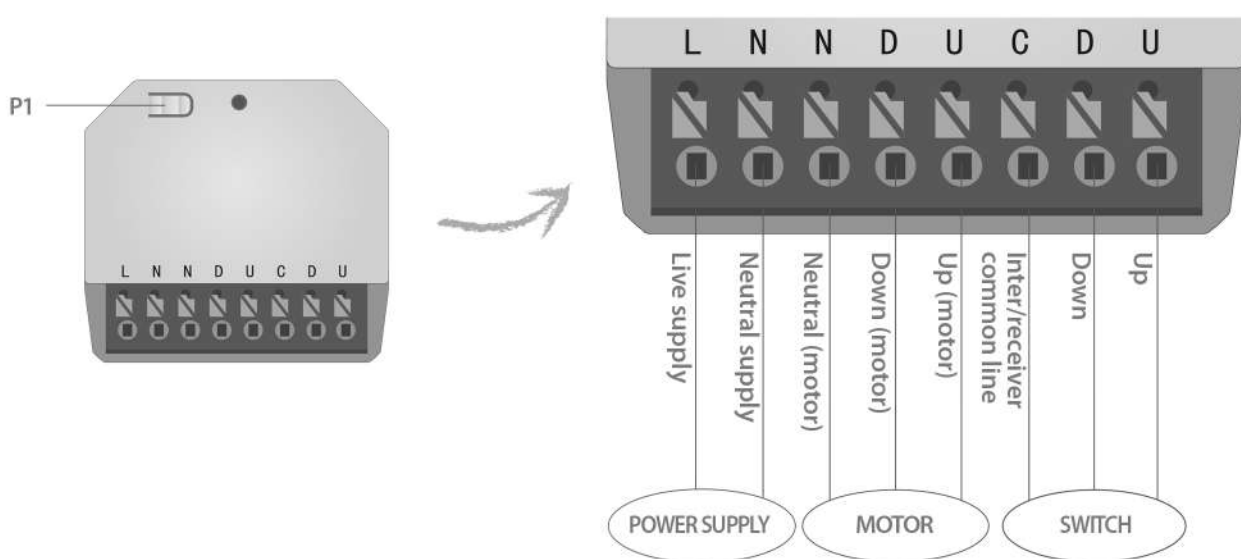

2 INSTALLATION

- a** Reconnect the motor to the power supply. A beep follows and the shutter curtain makes an up and down movement. Red light flashes.
- b** Perform a functional test on the switch.

3 CONNECT WITH THE APP

- a** Connect with the WiFi.
- b** Install the AvosDim Smartphone App.
- c** Create an account.
- d** Add the product "WiFi Receiver".
- e** Select the WiFi network.
- f** Press and hold P1 for 2 seconds. The light flashes quickly and the motor makes a movement.
- g** Exit the AvosDim app.
- h** Choose WiFi Connector network on the Smartphone.
- i** Return to the AvosDim app. The connection shows as validated.
- j** If the rotation direction is incorrect, it's possible to modify on the app.
- k** Information on the automation of the house (rooms, scenarios..).

4 TROUBLESHOOTING

- There is no beep when connecting the motor :
As soon as the motor is supplied with power, a beep sounds. Use a current tester to make sure that the motor has been properly connected to power. If this is the case and the motor still does not beep, please contact the seller.
- Problems with the connection :
We recommend using a rigid cable (1.5 mm²). When using a flexible cable, make sure that the cables are sufficiently stripped and sturdy.

5 RECEIVER RESET

Press and hold **P1** button for 10 seconds. Release when the LED flashes slowly.